

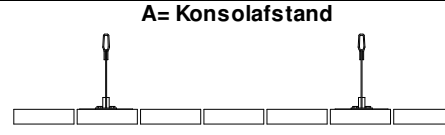


| // Belastningstabel for VTO murkonsoller //  |   |  |        |   |                |
|--|---|--|--------|---|----------------|
| Skalmur<br>belastning<br>murhøjde i<br>meter | Belastning pr. konsol:(Skalmurens tyngde = 2,40 kN/m <sup>2</sup> )                                   |  |        | Regnings-<br>mæssige<br>last - VTO<br>konsoller | Konsol<br>Type |
|  | A= Konsolafstand<br> | A= Konsolafstand<br> |        |   |                |
|  | A=24 cm   | A=48 cm  | 7 sten |   |                |
| 1  | 0,54  | 1,08   | 1,80   | 5 kN  | 3,5 kN         |
| 2  | 1,08  | 2,16   | 3,60   | 8 kN  | 7,0 kN         |
| 3  | 1,62  | 3,24   | 5,40   | 8 kN  | 7,0 kN         |
| 4  | 2,16  | 4,32   | 7,20   | 15 kN   | 10,5 kN        |
| 5  | 2,70  | 5,40   | 9,00   |   |                |
| 6  | 3,24  | 6,48   | 10,75  |   |                |
| 7  | 3,78  | 7,56   | 12,55  |   |                |
| 8  | 4,32  | 8,64   | 14,34  |   |                |
| 9  | 4,86  | 9,72   |        |   |                |
| 10   | 5,40  | 10,37  |        |   |                |
| 11   | 5,94  | 11,40  |        |   |                |
| 12   | 6,48  | 12,44  |        |   |                |

Overliggerne i skemaet, skal ikke understøttes ved opmuring

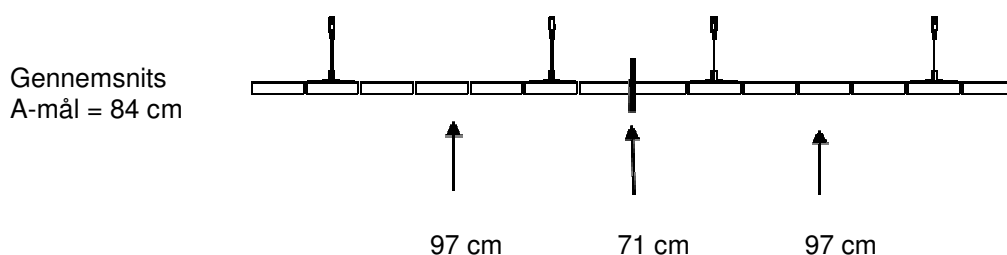

Ankerdimensionen **skal** svare til belastningsklassen - Regningsmæssig C25 beton

| VTO Konsol type | M12 Klæbeanker dimension | Minimum afstand til beton forkant | Tilspændings moment |
|-----------------|--------------------------|-----------------------------------|---------------------|
| 3,5 kN          | M12 x 180                | 110 mm                            | 40 Nm               |
| 7,0 kN          | M12 x 180                | 110 mm                            | 40 Nm               |
| 10,5 kN         | M12 x 180                | 110 mm                            | 40 Nm               |

VTO anvender kun rustfri ankerstænger i kvalitet DIN 304

Rev. 22.01.2025